

THE MOST ECONOMICAL LIGHTING
SOLUTION FOR YOUR
ADVERTISING



INNOVATIVE LED LIGHTING
HIGH PERFORMANCE

2026-2027

www.dv-led.com



THE SOLUTION FOR


DYNAMIC SIGN SIGNAGE LIGHT BOX

Economize

- Reduce LED usage amount.
- Reduce Electricity power consumption.
- Reduce your labor cost, shorten project time.

INNOVATIVE LED LIGHTING



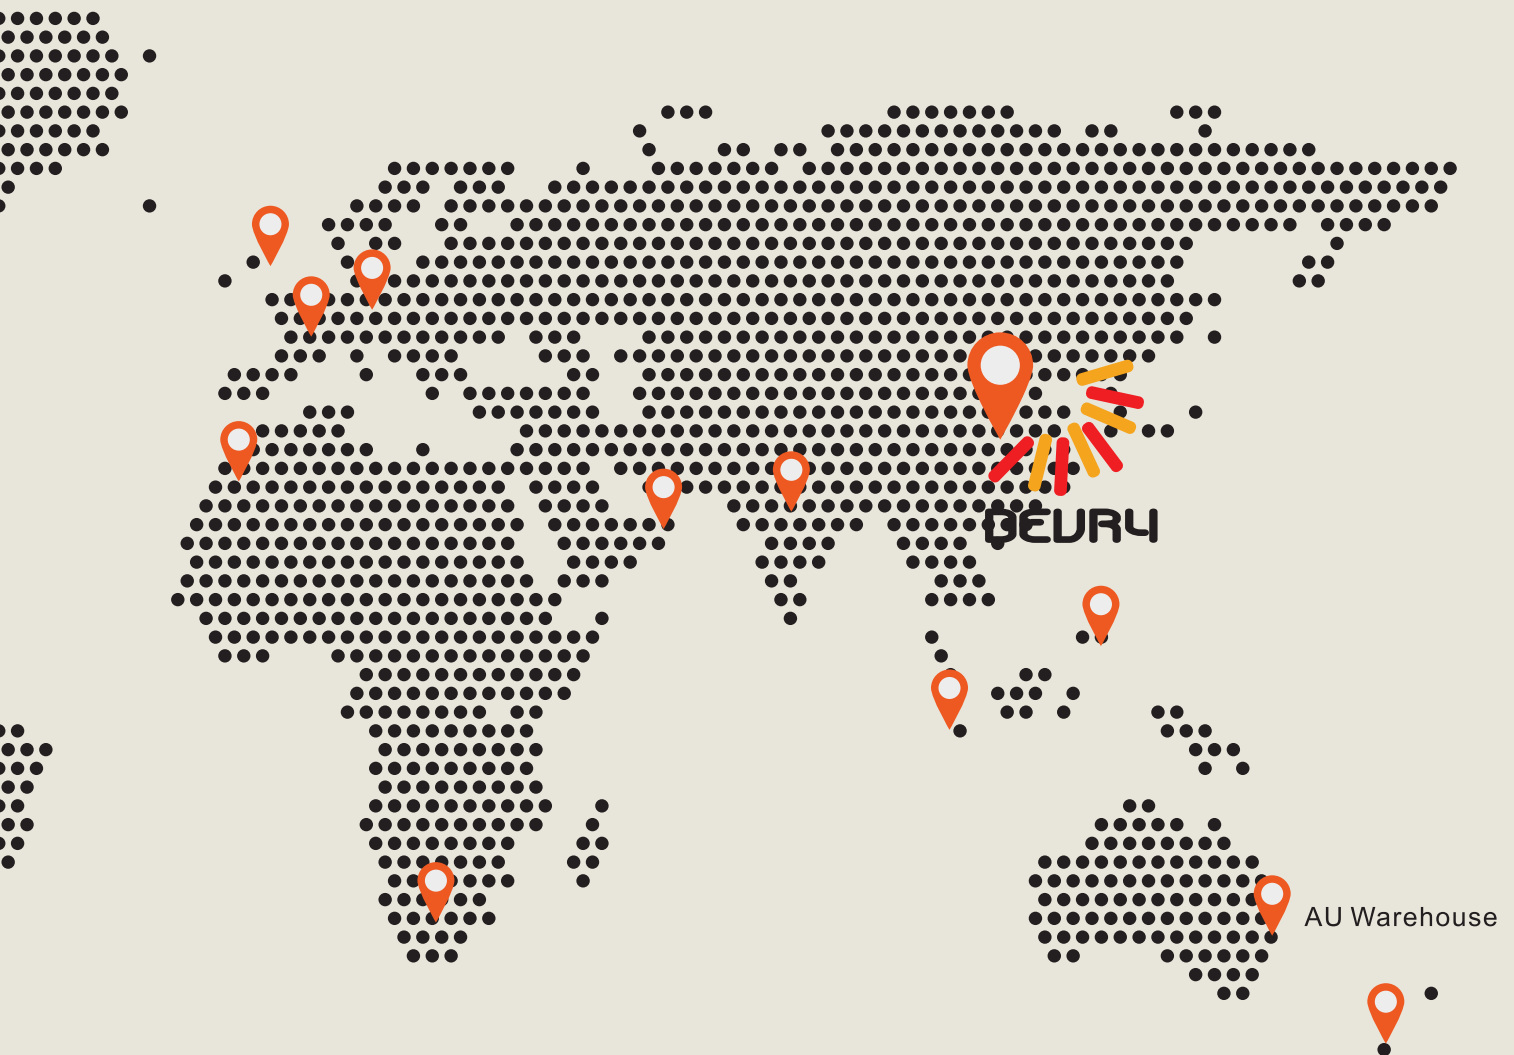

- Focus on Advertising Lighting **18** years
- More than **500** customers under cooperation
- Presence in **50** countries



THE MOST ECONOMICAL LIGHTING SOLUTION FOR YOUR ADVERTISING

- Lead-free reflow soldering machine
- Office
- Integrating sphere
- Laboratory



DEVRY
TECHNOLOGY

DEVRY

2009 Shanghai



2010 Dubai

2010 USA

2010 Germany

2011 Germany

2011 Shanghai

2012 Shanghai

2013 Guangzhou

2014 Germany

2015 India

2015 Shanghai

2016 India



2019 Fespa

2015 Dubai

2026
Dubai Fespa



2020 SGI

2025
Sydney
Visual

2024 Visual Brisbane

2016 Dubai

2017 Dubai

2018 SGI

2008 DEVRY established in HK

2009 We set up our factory in Nanjing, in the beginning, we produce Piranha series led products. Successfully develop the led module, strip for the advertising light. Our products have CE, RoHS, UL certification.

2014 We moved to Shenzhen. Enlarge our factory to 3000square meters. We produce led module, led strip, neon rope etc. At the same time, We established Zhongshan factory and produce commercial light for the outdoor project and indoor commercial light.

2017 We registered our DEVRY Singapore branch to develop our global market.

2018 We focus on LED PCBA Assembly, the factory covers and area over 5000 square meters, with 20 professional R&D engineers, 8 fully automatic production lines. The daily output capacity is 100,000pcs PCBA.

2024 We set up our showroom and warehouse in Australia Wollongong.

2023 Dubai lighting

2024 Japan Lighting

DEVRY continue...

YEARS

2024 Dubai SGI

DEVRY LED, founded in 2008, we focus on developing and innovating LED product for commercial light market. We are a professional LED signage lighting manufacturer dedicated to designing, producing, and delivering high-quality, energy-efficient LED lighting solutions for global clients.

Why Choose Us?

- √ Advanced Technology – Utilizing the latest LED chips and smart driver technology to ensure high brightness, long lifespan, and low energy consumption.
- √ Custom Solutions – We offer tailor-made LED signage lighting, including LED modules, LED neon lights, LED strips, and more to meet diverse needs.
- √ Strict Quality Control – From raw materials to finished products, we implement rigorous quality inspections to guarantee stable and reliable performance.
- √ Global Reach – Our products are widely exported to Europe, North America, Australia, Southeast Asia, and the Middle East, earning excellent customer feedback.
- Eco-Friendly & Certified – All products comply with RoHS, CE, and UL standards, ensuring environmental safety and international compliance.

Applications

Commercial Signage & Light Boxes

Indoor & Outdoor LED Neon Lighting

Architectural Outline & Urban Lighting Projects


Shopping Malls, Hotels & Exhibition Displays

With a commitment to "Quality First, Customer Foremost," we provide eye-catching LED solutions that make your brand shine!

CERTIFICATION



LED Waterproof Module For 6cm Thickness Channel Letter

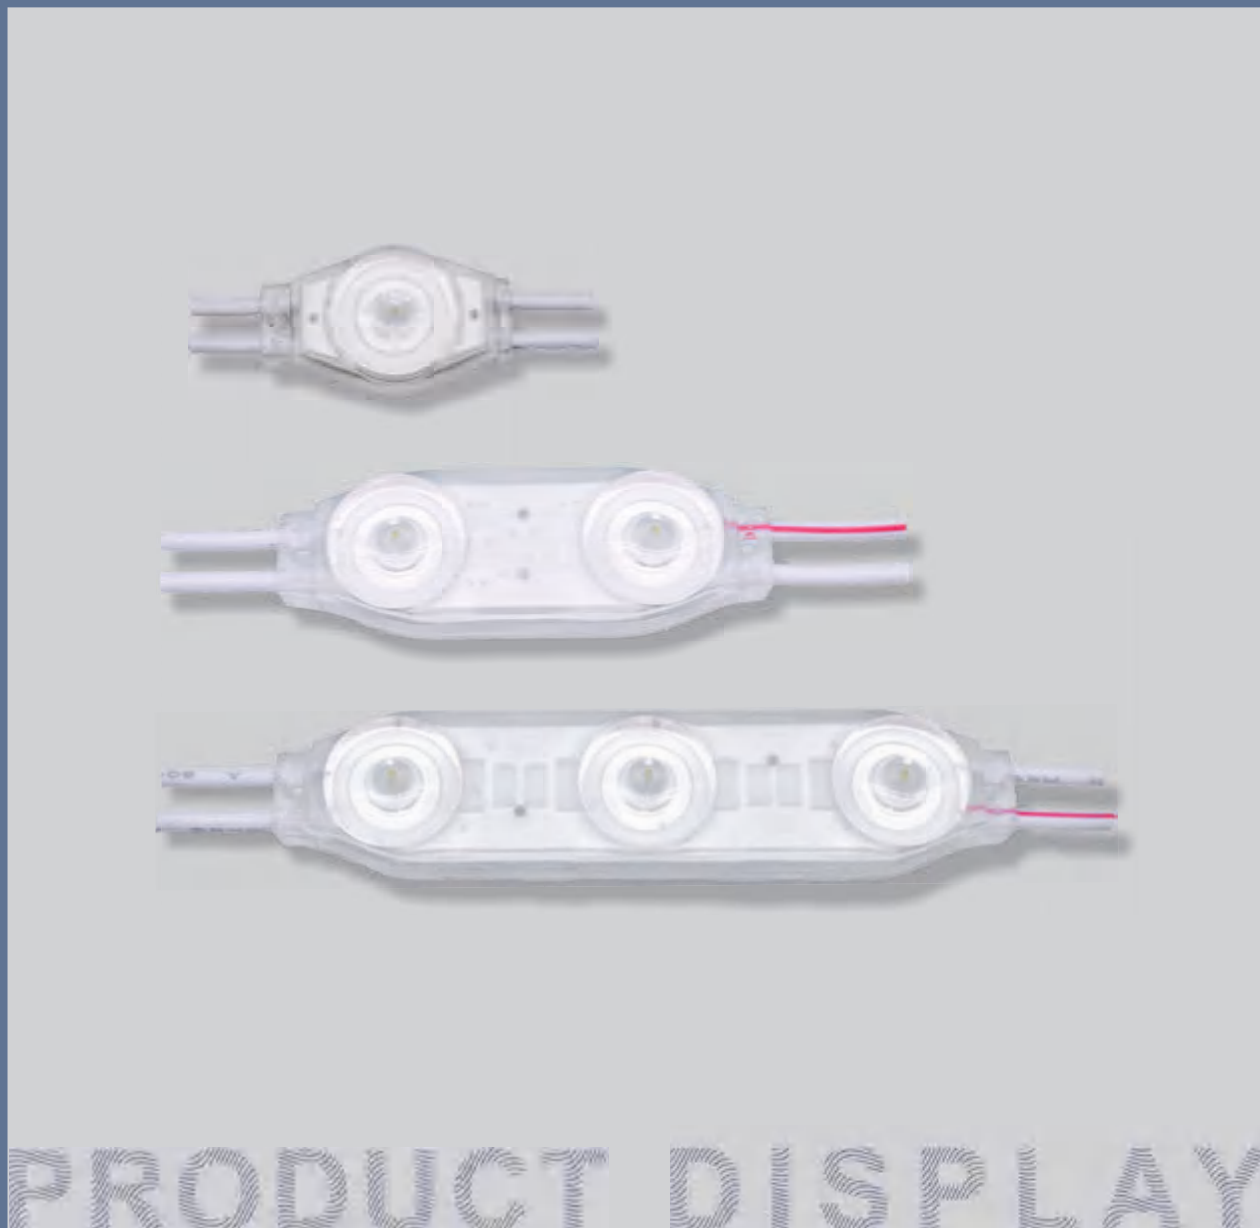


PRODUCT DISPLAY

DEVRY CONTINUE...


www.dv-led.com

LED Waterproof Module


PRODUCT DISPLAY

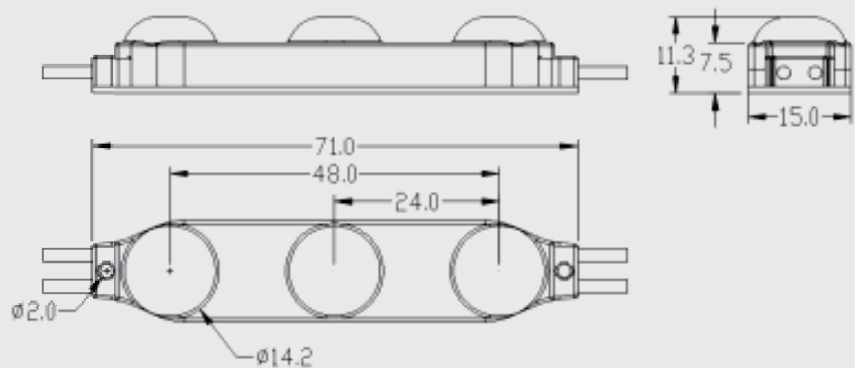

Module Number	DV-LSWM3S2835W12175 -7016
Dimension	70*16*8mm
Rated Power	1.2W
Power Supply	DC12V/24V
Luminous Flux	156lm/216lm
Light Effect	130lm/W 180lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Angle	175°
Waterproof Rate	IP68
Packing	100pcs/Bag
Warranty	7Years

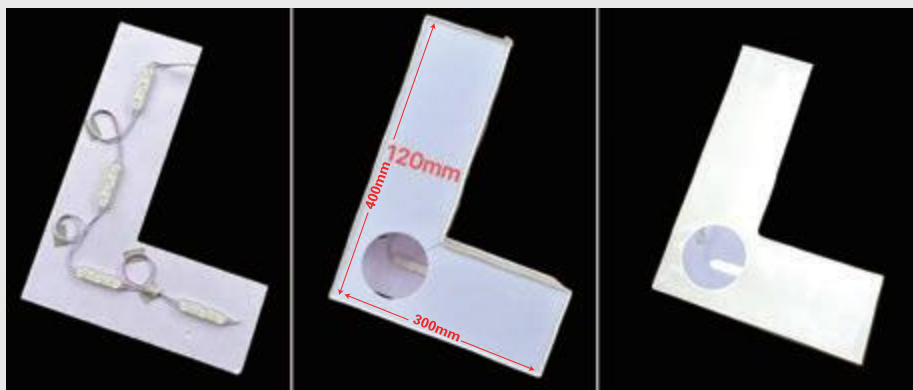


LED Waterproof Module



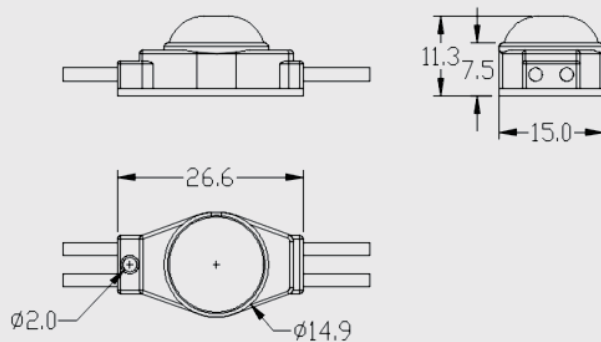


Module Number	DV-LSWM1S2835W12175 -2716
Dimension	27*16*8mm
Rated Power	0.36W
Power Supply	DC12V
Luminous Flux	50.4lm
Light Effect	140lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Angle	175°
Waterproof Rate	IP68
Packing	100pcs/Bag
Warranty	7Years

Module Number	DV-LSWM2S2835W12175 -4816
Dimension	48*16*8mm
Rated Power	0.75W
Power Supply	DC12V
Luminous Flux	97.5lm
Light Effect	130lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Angle	175°
Waterproof Rate	IP68
Packing	100pcs/Bag
Warranty	7Years

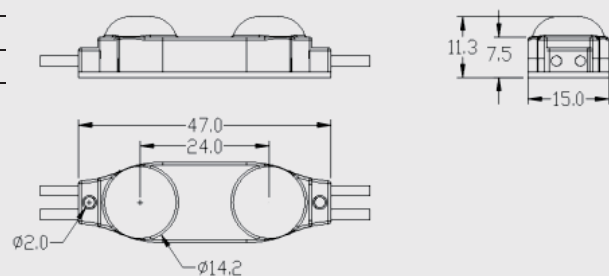


LED Sign Module For 30mm–60mm Thickness Channel Letter

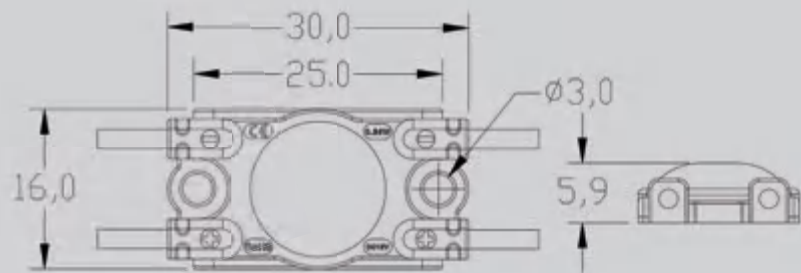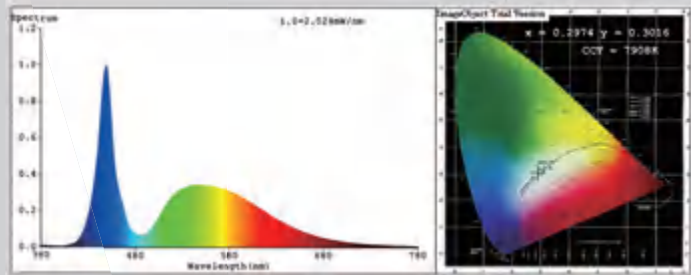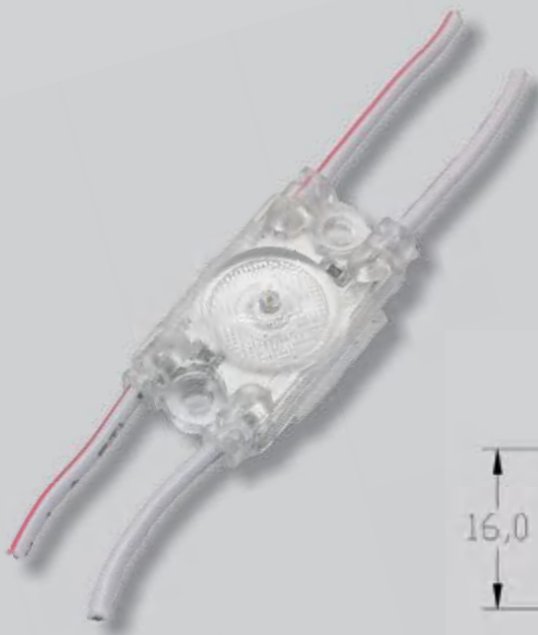

Module Number	DV-LSWM1S3016
Dimension	30*16*5.9mm
Rated Power	0.4W
Power Supply	DC12V/DC24V
Body Main Materials	ABS
Luminous Flux	40lm/72lm
Light Effect	100lm/W 180lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+60℃
Angle	175°
Waterproof Rate	IP67
Packing	100pcs/Bag
Warranty	7 years

Lighting solution for 30MM–60MM Thickness Slim Channel letter

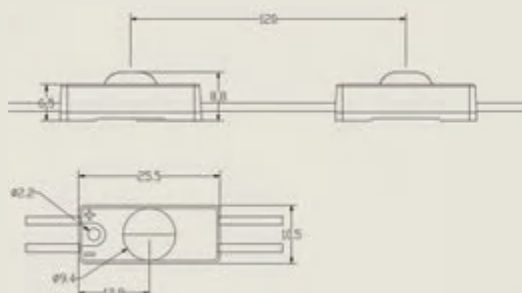


Module Number	DV-LSWM1S3030W160-2510
Color temperature	3000K-9000K
Waterproof Rate	IP65
Voltage	DC 12V
Power/Module(w)	0.72W
Lumen/module	100lm
Efficiency(lm/w)	140lm/w
Beam Angle	160°
Driving System	Constant voltage transformer
Module/chain	20modules
Modules max in series	50modules
Warranty	5years
Packaging	200 modules per bag


LED 175°High Power Module



www.dv-led.com

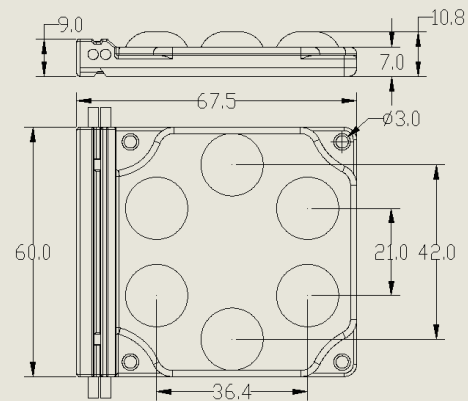

Module Number	DV-LSWM-6S3030-X-12-175
Dimension	67.5*60*10.8mm
Rated Power	6W
Power Supply	DC12V
Body Main Materials	ABS
Luminous Flux	540lm
Light Effect	95lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25°C~+60°C
Angle	175°
Waterproof Rate	IP65
Packing	20pcs/strip ;40pcs/Bag
Warranty	5 years

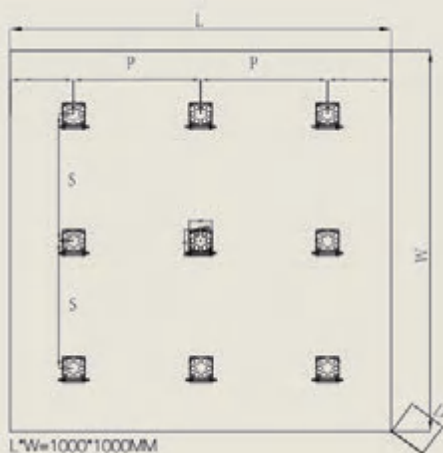


9pcs in 1 square meter light Box

Layout


Depth(mm)	Distance(mm)	Density(pcs/m ²)	Illumination(Lux)	Surface Brightness Difference	UniformLight Rank
D=100	P=330, S=330	12	2000-3000	5%-10%	Good
D=120	P=330, S=330	9	2000-2500	5%-10%	Good
D=150	P=330, S=330	9	1500-2000	5%-10%	Good
D=200	P=330, S=330	9	1000-1500	5%-10%	Good

LED 175° High

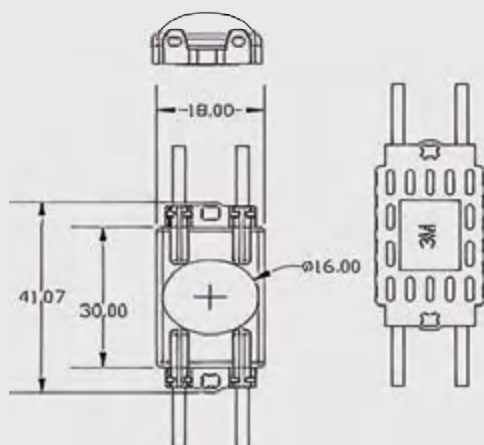



Module Number	DV-LSWM-1S2835-X-12-175
Dimension	41.07*18*11mm
Rated Power	1W
Power Supply	DC12V
Body Main Materials	ABS
Luminous Flux	95lm
Light Effect	95lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+60℃
Angle	175°
Waterproof Rate	IP65
Packing	20pcs/strip
Max quantity per strip	60pcs
Warranty	5Years

Module Number	DV-LSWM-3S2835-X-12-175
Dimension	96*18*11mm
Rated Power	3W
Power Supply	DC12V
Body Main Materials	ABS
Luminous Flux	285lm
Light Effect	95lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+60℃
Angle	175°
Waterproof Rate	IP65
Packing	20pcs/strip
Max quantity per strip	20pcs
Warranty	5Years

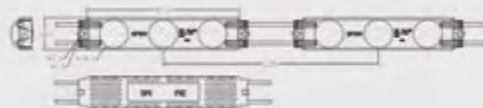

Power Module

Module Number	DV-LSWM-5S2835-X-12-175
Dimension	83.5*43*22.2mm
Rated Power	5W
Power Supply	DC12V
Body Main Materials	ABS
Luminous Flux	475lm
Light Effect	95lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+60℃
Angle	175°
Waterproof Rate	IP65
Packing	20pcs/strip
Warranty	5Years

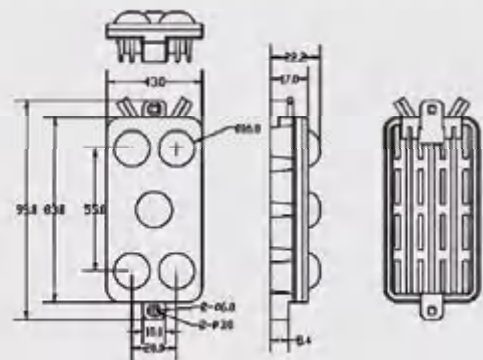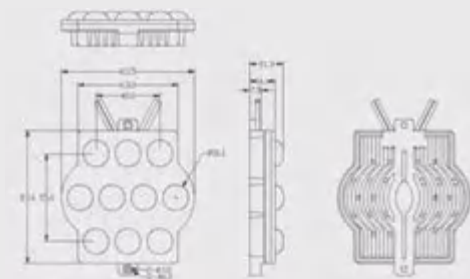

ne BIN ONLY	CE	ROSH
3/5 Years Warranty	Ra 80/90/95 Available	DC12/ 24V

Module Number	DV-LSWM-10S2835-X-12-175
Dimension	83.5*83*21.3mm
Rated Power	10W
Power Supply	DC12V
Body Main Materials	ABS
Luminous Flux	950lm
Light Effect	95lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+60℃
Angle	175°
Waterproof Rate	IP65
Packing	10pcs/strip
Warranty	5Years

AC 220V HIGH POWER MODULE




► P.F>0.92


Over temperature, short circuit protection, fireproof

www.dv-led.com

DV-LSWM-3S2835-X-220-155

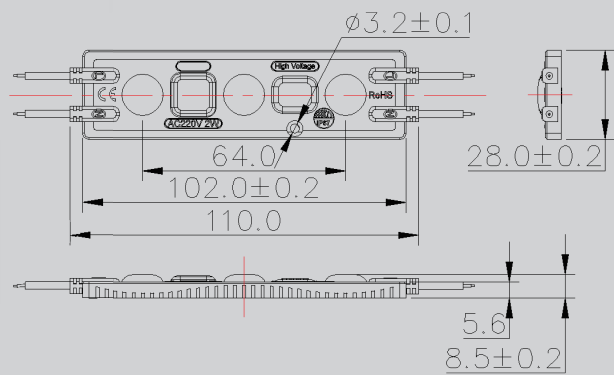


DV-LSWM-6S2835-X-220-165

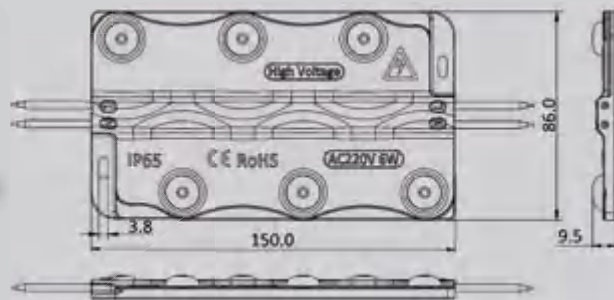


Module Number	DV-LSWM-3S2835-X-220-155
Dimension	110*28*8.5mm
Rated Power	2.5W
Power Supply	220V-240V AC/100-130V AC
Luminous Flux	200lm
Light Effect	80lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+70℃
Angle	155°
Waterproof Rate	IP67
Standard cascade	100pcs one chain
Warranty	5 years

Module Number	DV-LSWM-6S2835-X-220-165
Dimension	150*86*9.5mm
Rated Power	6W
Power Supply	220V-240V AC/100-130V AC
Luminous Flux	480lm
Light Effect	83lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+70℃
Angle	165°
Waterproof Rate	IP67
Standard cascade	50pcs one chain
Warranty	5 years




LED Mini Module

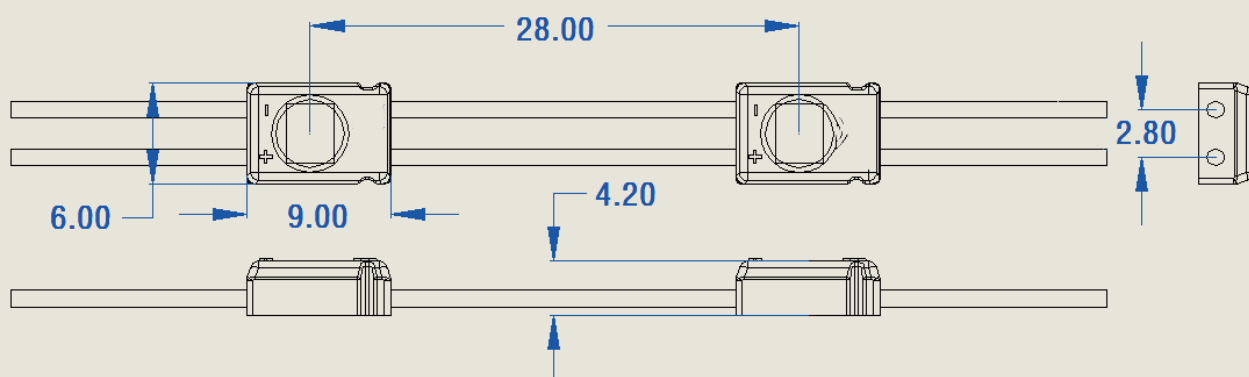

Module Number	DV-LSMM-1S2835W12120
Dimension	8.5*6*3.2mm
Rated Power	0.24W
Power Supply	DC12V
Body Main Materials	PC
Luminous Flux	38lm
Light Effect	160lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+60℃
Angle	120°
Waterproof Rate	IP65
Packing	50pcs/strip,500pcs/bag
Warranty	3 years

RGB & RGBW Module

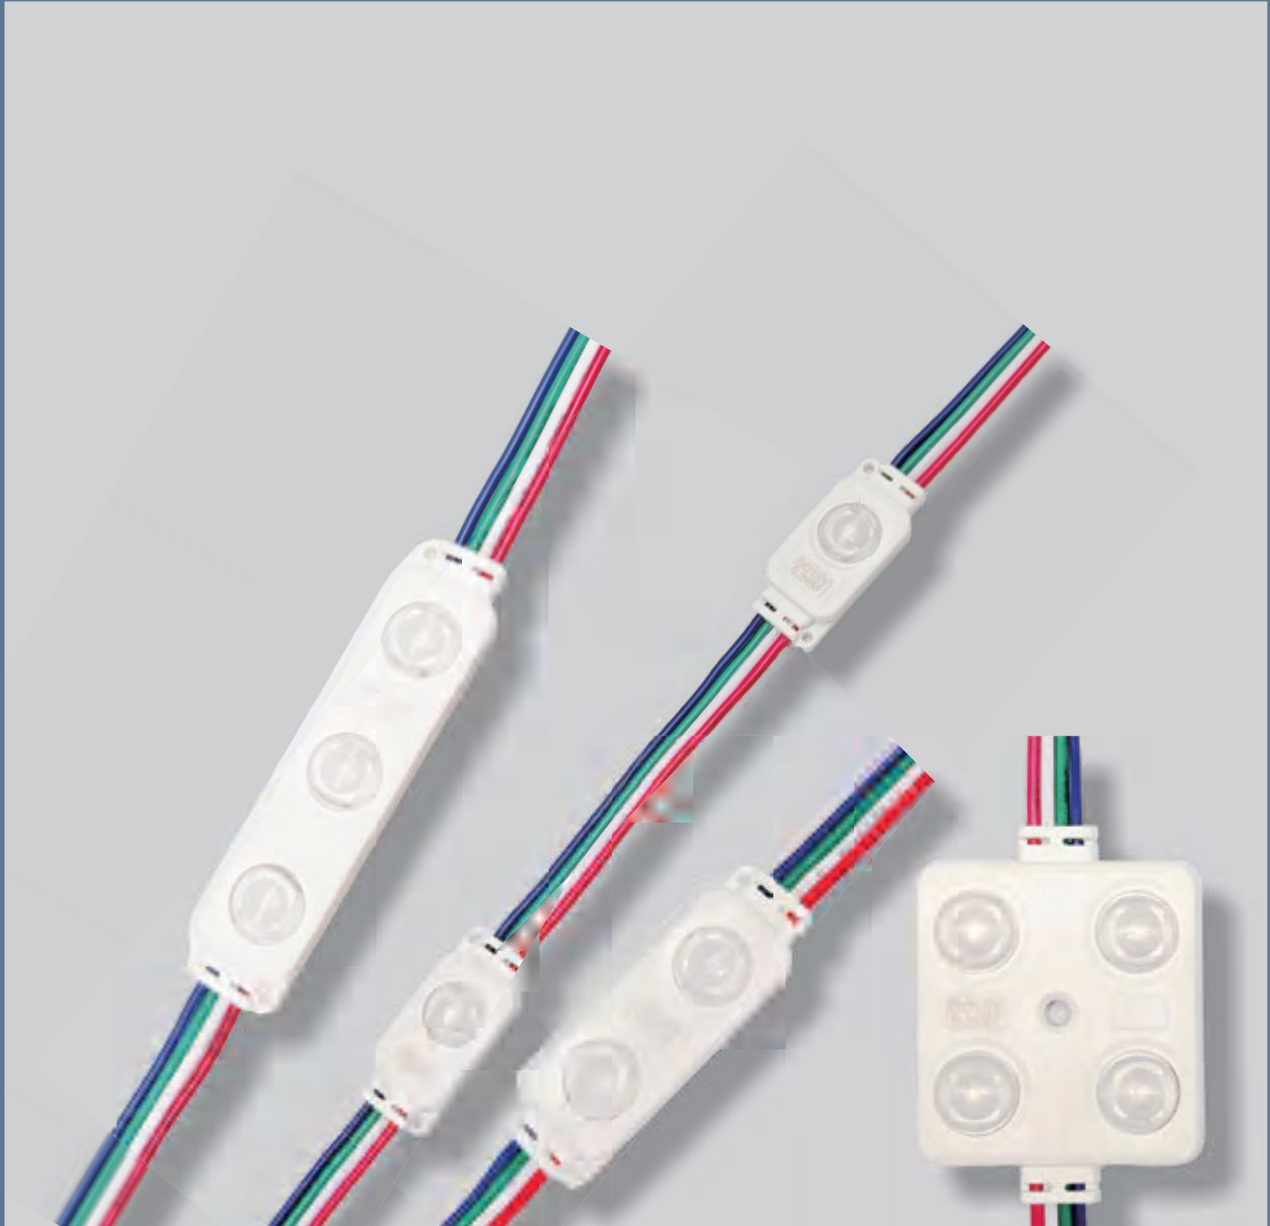

www.dv-led.com

PRODUCT DISPLAY

LED RGB



Module Number	DV-LSWM-1SRGB
Dimension	24.5*15.4*5.8mm
Rated Power	0.24W
Power Supply	DC12V
Body Main Materials	ABS
Color	RGB
Working Temperature	-25℃~+60℃
Angle	160°
Waterproof Rate	IP65
Packing	20pcs/strip;100pcs/Bag
Warranty	3years



Module Number	DV-LSWM-2SRGB
Dimension	39.5*15.4*5.8mm
Rated Power	0.48W
Power Supply	DC12V
Body Main Materials	ABS
Color	RGB
Working Temperature	-25℃~+60℃
Angle	160°
Waterproof Rate	IP65
Packing	20pcs/strip;100pcs/Bag
Warranty	3years

MODULE



Module Number	DV-LSWM-3S RGB
Dimension	60.5*15.4*5.8mm
Rated Power	1W
Power Supply	DC12V
Body Main Materials	ABS
Color	RGB
Working Temperature	-25℃~+60℃
Angle	160°
Waterproof Rate	IP65
Packing	20pcs/strip;100pcs/Bag
Warranty	3years



Module Number	DV-LSWM-4S RGB
Dimension	39.5*36.3*5.8mm
Rated Power	1.44W
Power Supply	DC12V
Body Main Materials	ABS
Color	RGB
Working Temperature	-25℃~+60℃
Angle	160°
Waterproof Rate	IP65
Packing	20pcs/strip;100pcs/Bag
Warranty	3years




RGB ADDRESSABLE



2811 IC

Module Number	DV-LSWM-3SRGBC
Dimension	65*14.8*6.5mm
Rated Power	0.72W
Power Supply	DC12V
Body Main Materials	ABS
Luminous Flux	R:4.5lm G:16.5lm B:3.6lm
Color	RGB
Working Temperature	-25℃~+60℃
Angle	160°
Waterproof Rate	IP65
Packing	20pcs/strip;100pcs/Bag
Warranty	3years

Light Box Lighting Solution ● - Edge Lightbar ●

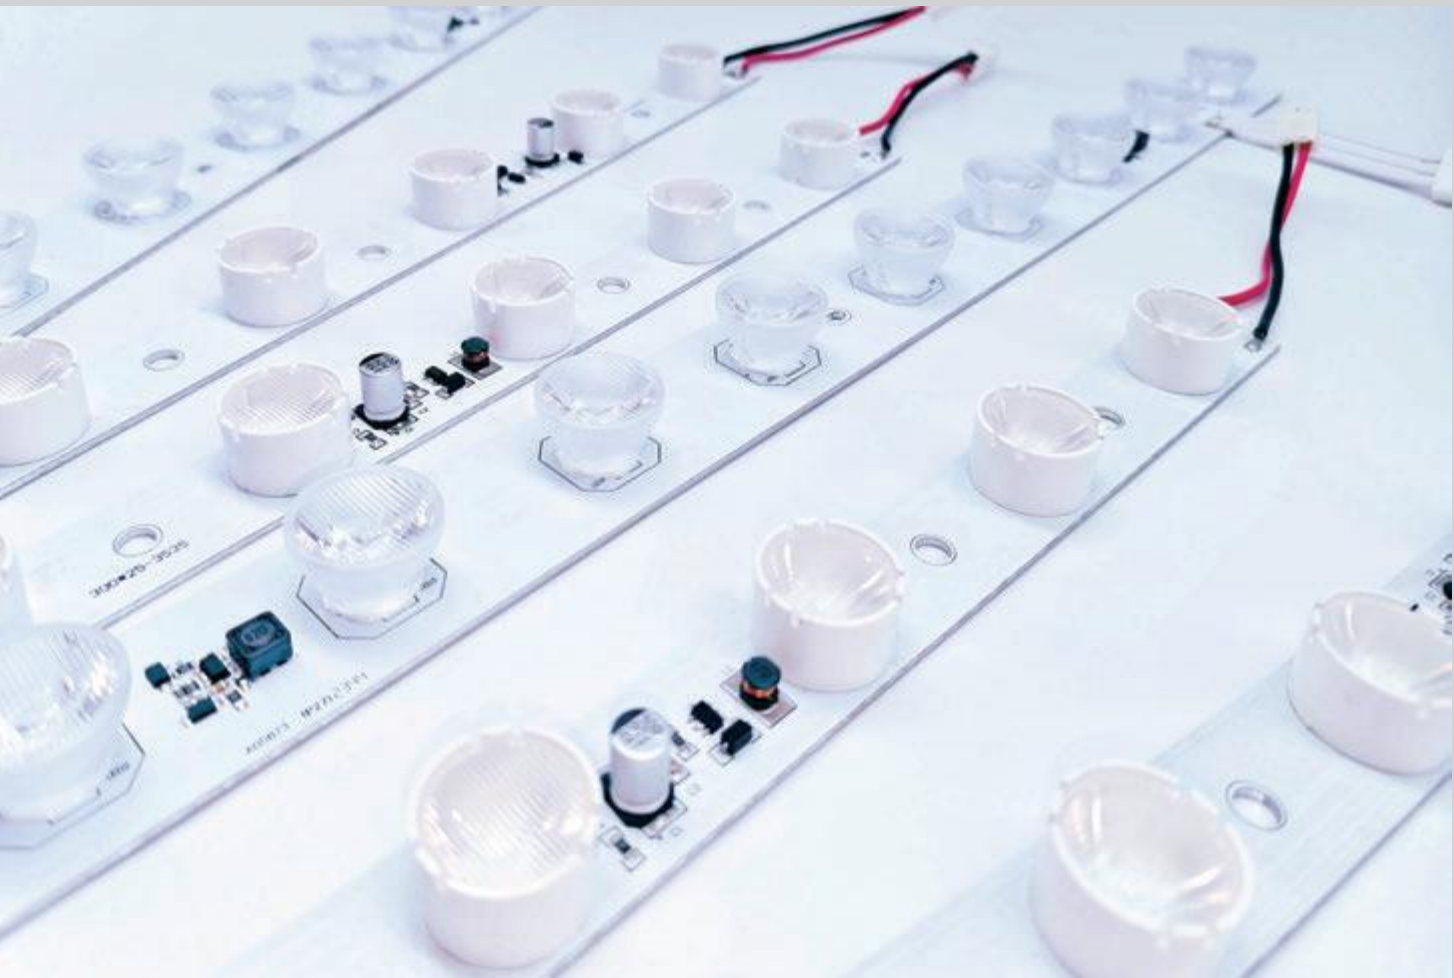

LED HIGH POWER LIGHTB

Beam can reach up to 5meters



DV-BL-20HP-36W-24-990

Item No	DV-BL-20HP-36W-24-990
LED Quantity	20LEDs/PCS
LED Chip Brand	Osram
Angle	10*30°
Voltage	DC24V
LED wattage	36W
Working temperature	-25℃~+60℃
Size	990*25*13.5mm



Every 2LEDs Cutting/
Every 5LEDs Cutting




AR CONSTANT CURRENT




DV-BL-5HP-15W-24-300

Item No	DV-BL-5HP-15W-24-300
LED Quantity	5LEDs/PCS
Chip brand	Cree
Intensity(lm)	675LM
Angle	9*50°
Voltage	DC24
LED wattage	13.5W
Working temperature	-25℃~+60℃
Size	300*25*13.8mm



Beam can reach to 3meters


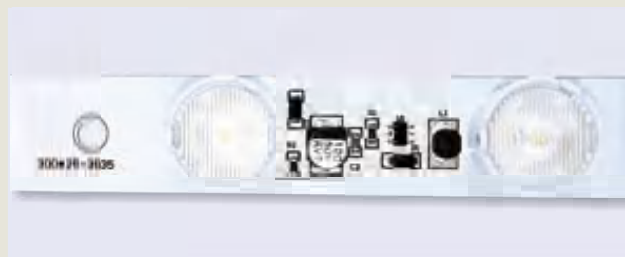


DV-BL-5HP-15W-24-360

Item No	DV-BL-5HP-15W-24-36
LED Quantity	5LEDs/PCS
LED Chip Brand	Cree
Intensity(lm)	675LM
Angle	9*50°
Voltage	DC24V
LED wattage	13.5W
Working temperature	-25℃~+60℃
Size	360*25*13.8mm



LED Module-Edge Light

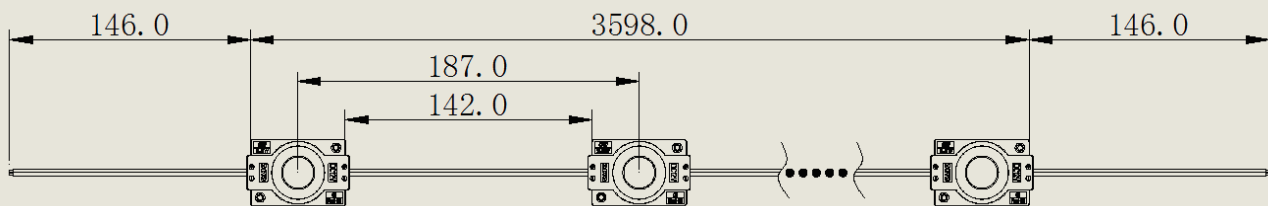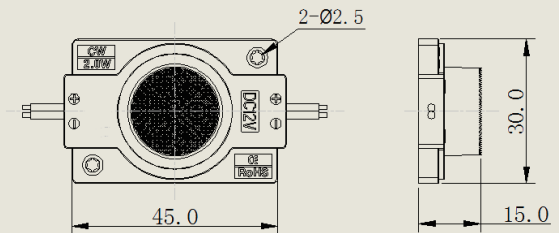

Module Number	DV-LSWM-1S3030-X-12-40P
Dimension	45*30*15mm
Rated Power	2.5W
Power Supply	DC12V
Body Main Materials	ABS
Luminous Flux	275lm
Light Effect	110lm/W
Color	Warm White/Pure White/Cold White
Color Temperature	3000K-9000K
Working Temperature	-25℃~+60℃
Angle	40°*15°
Waterproof Rate	IP65
Packing	20pcs/strip;100pcs/Bag
Warranty	5 years

LED Waterproof Lens Strip, Suitable for thickness from 40mm to 120mm



NO-SOLDER/ 1LED CUTTING




Module Number	DV-WLS24-2835-24V
CCT	3000K-9000K
Voltage	DC 24V
Cutting unit	1 led/cutting
Beam Angle	170°
Waterproof	IP65
Working Lifetime(Hour)	30000h
Working Temperature(C)	-20°C ~ +40°C
LED Quantity	24leds/M
Power	14W/M $\pm$ 10%
Lumen	1470lm/m
Efficiency(lm/w)	1051lm/W
Length	20Meters/Roll
Warranty(Year)	5 Years

Light Box Lighting Solution ● - LED Roller Strip ● ● ●



www.dv-led.com

Solder Free Roller Strip

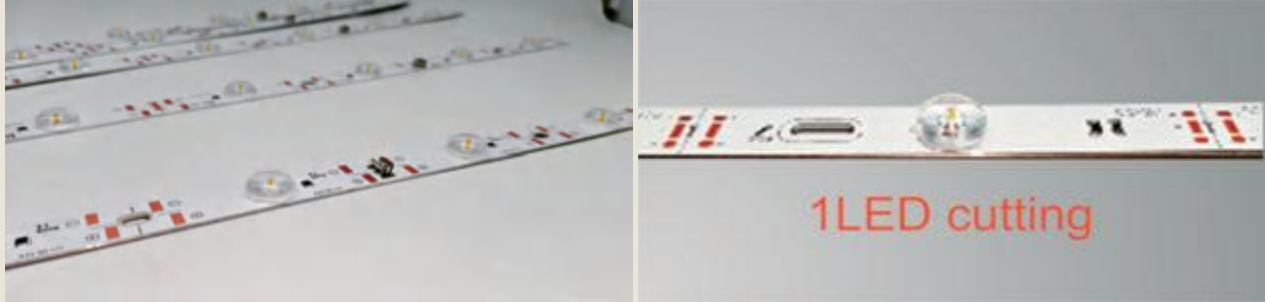

Connect By Wire

Item No	DV-RS-12S2835-W-12
Voltage	DC12V
LED Quantity	12leds/pc
Power	12W/pc
Efficiency	100 lm/w
Intensity(lm)	1200lm
LED Color and CCT	Cool white(7000~ 8000K) 、
	Pure white(6000~ 6500K)
	Warm white(3000~ 3500K)
Size	960*17*1.2mm
Viewing angle	160°



High Intensity Roller Strip



Item No	DV-RS-6S2835-W-12
Voltage	DC12V
LED Quantity	6leds/pc
Power	6W/pc
Efficiency	100lm/w
Intensity(lm)	600lm
LED Color and CCT	Cool white(7000~ 8000K) 、
	Pure white(6000~ 6500K)
	Warm white(3000~ 3500K)
Size	530*15*1.2mm
Viewing angle	160°

220V AC LIGHT BAR FOR LIGHT BOX

DV-HVB-220

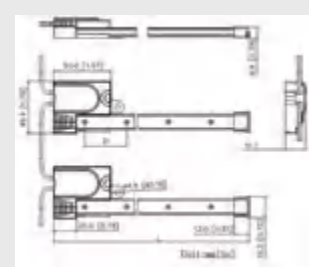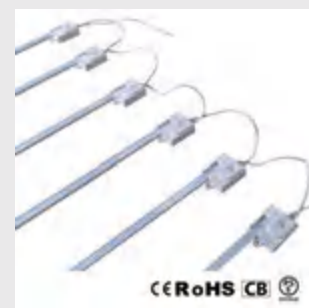

Description

AC85-265V LED light bar is a new generation light for the light box. Driver in-built design makes installation easy. The whole body waterproof treatment, IP67. High intensity, 6pcs per string.



Application

Light box indoor and outdoor, Indoor ceiling, building light box. Depth of the box is from 15cm to 40cm.

Parameters

Item No	Color Temperature	LED Quantity	Voltage	Power(W)	Angle	Ra	Intensity (LM/PC)	Efficiency (LM/W)	Size	Working Environment
DV-HVB-26	2700-15000K	26	AC 85-265V	5	120°	80	577.5	115.5	595*45.4*17.5mm	-20°~60°C
DV-HVB-34	2700-15000K	34	AC 85-265V	7	120°	80	798	114	740*45.4*17.5mm	-20°~60°C
DV-HVB-40	2700-15000K	40	AC 85-265V	8	120°	80	916	114.5	900*45.4*17.5mm	-20°~60°C
DV-HVB-52	2700-15000K	52	AC 85-265V	10	120°	80	1150	115	1180*45.4*17.5mm	-20°~60°C

Remark:






The test environment temperature was 25±2°C.

The above data are typical values, and the actual parameters of the product may differ from the typical data.

Interior data for reference

Product item no	Bottom of the light box	Surface material	Depth of light box(cm)	Lux	Pcs /m ²
DV-HVB-52	White base	White soft film	15	3200-3500	6
			16	3000-3200	6
			17	2800-3000	6
			18	2500-2800	6
			19	2200-2500	6
			20	2000-2200	6
			30	1800-2000	6
			40	1500-1800	6

Installation

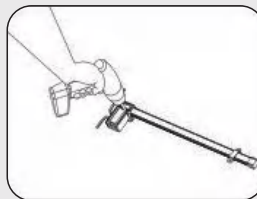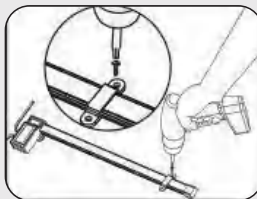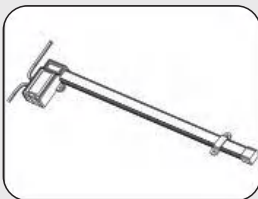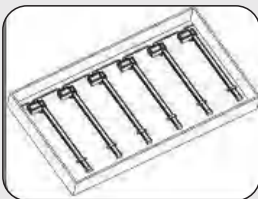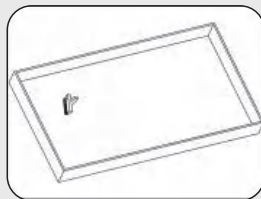

LED Neon





www.dv-led.com

Integrate Neon



PRODUCT
DISPLAY

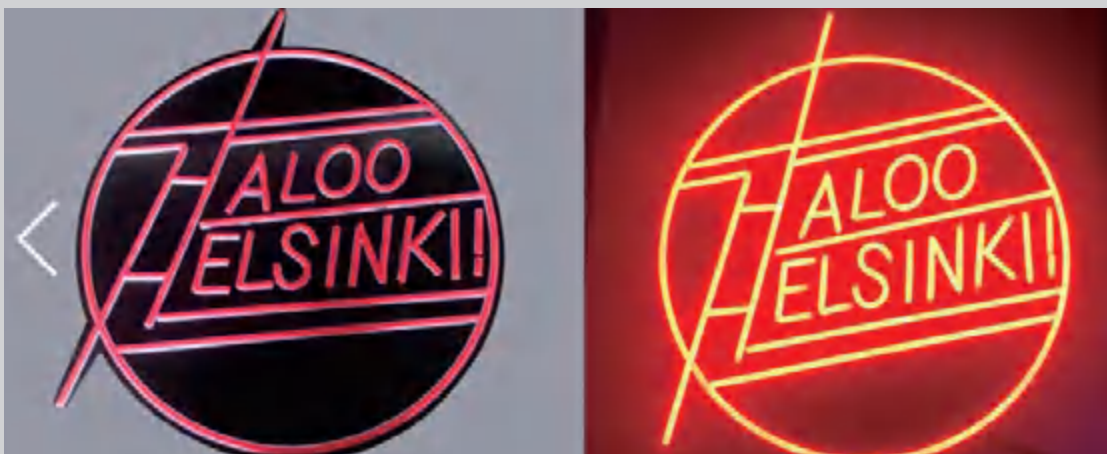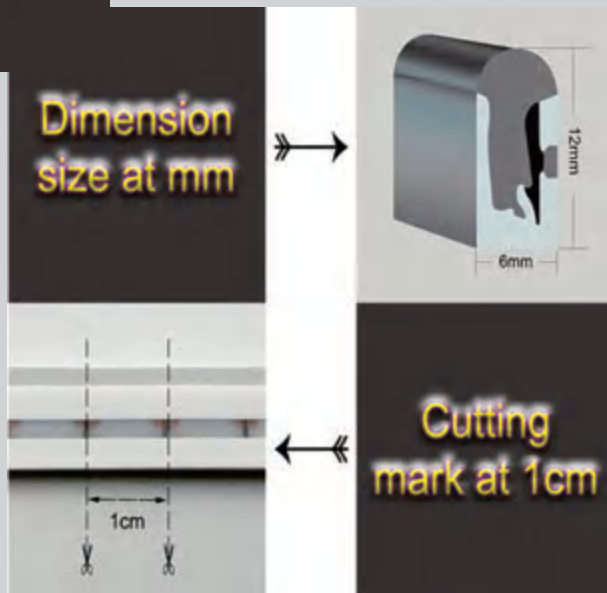

LED Separate Neon





Model Number	LED	LED Quantity	Neon Tube Dimension	Voltage	Wattage	Packing	Warranty
DV0610	2835	120leds/m	6*10mm	DC12V	9.6W/m	50M/reel	2 Years


Model Number	LED	LED Quantity	Neon Tube Dimension	Voltage	Wattage	Packing	Warranty
DV0810	2835	120leds/m	8*10mm	DC12V	9.6W/m	50M/reel	2 Years






Model Number	LED	LED Quantity	Neon Tube Dimension	Voltage	Wattage	Packing	Warranty
DV1212	2835	120leds/m	12*12mm	DC12	9.6W/m	50M/reel	2 Years

Neon Tube Rope



www.dv-led.com

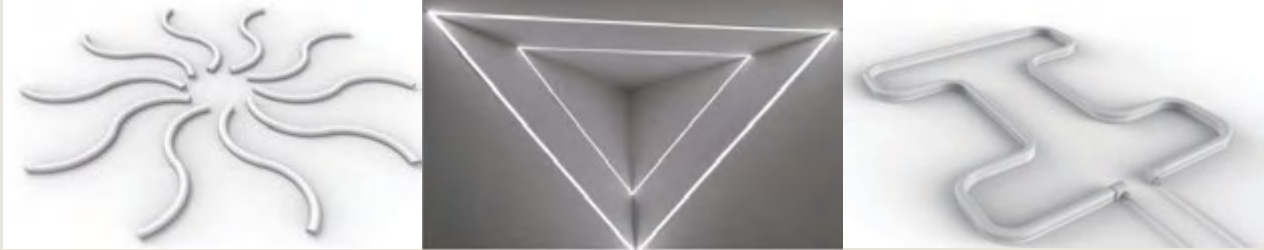

	PIC	ITEM Number	Size	LED	Beam Angle	PCB Width	Wattage
Positive Lighting		DV1010P	W10*H10	2835	120°	6mm	24V
		DV1010P3	W10*H10	2835	180°	6mm	24V
		DV1212P	W12*H12	2835	120°	8mm	24V
		DV1212P3	W12*H12	2835	180°	8mm	24V
		DV1616P	W16*H16	2835	120°	10/12mm	24V
Edge Lighting		DV0410	W4*H10	2835	120°	5/6mm	24V
		DV0610	W6*H10	2835	120°	8mm	24V
		DV1212E	W12*H12	2835	120°	5mm	24V
		DV1616E	W16*H16	2835	120°	10mm	24V
Big angle		DV270 (270°)	φ13	2835	270°	5mm	24V
		DV360 (360°)	φ16	2835	360°	double-side 6mm	24V

DIMMER & C



Item Number	DV-TKRF DMI04
Size	L86*W86*H11mm
Button battery	1pcs*CR2025
Wronking Frequency	RF433Mhz
Working Voltage(V)	DC5-24V
Outpur current	< 10A
Output wattage	5V < 200W, 12V < 600W, 24V < 1200W

Item Number	DV-TKRF DMI06
Size	L102*W62*H20mm
Working Voltage(V)	DC5-24V
Outpur current	< 20A
Output wattage	12V < 360W, 24V < 720W
Working Temperature	-20 ~ 60 °C



Item Number	DV-TK DMI01
Size	L85*W62*H35mm
Working Voltage(V)	12-24V
Output current	< 30A
Working temperature	-20-70 °C

Item Number	DV-SK DMI02
Size	L755*W35*H20mm
Working Voltage(V)	5-24V
Outpur current	< 6A
Induction range	8m
Delay time	1-10min(adjustable)
Working temperature	-20-60 °C



ONTROLLER

Item Number	DV-YS-RFHC 05
Supply voltage	DC5-24V
Size	L40*W12*H5mm
Neight Weight	0.35kg
Controllable IC count	2048



Item Number	DV-YS-MINIRF DMI02
Supply voltage	DC5-24V
Size	L69*W31*H14mm
Neight Weight	0.48Kg
Output power	5V:<40W, 12V:<96W, 24V:<192W
Maximum current	8A



Item Number	DV-YS-MINIRF RGB01
Supply voltage	DC5-24V
Size	L55*W22*H13mm
Neight Weight	0.03Kg
Output power	5V:<30W, 12V:<72W, 24V:<144W
Maximum current	6A

Item Number	DV-YS-MINIRF RGBW02
Supply voltage	DC5-24V
Size	L55*W22*H13mm
Neight Weight	0.03Kg
Output power	5V:<40W, 12V:<96W, 24V:<192W
Maximum current	6A




Transformer & Adaptor



www.dv-led.com

Transformer

ITEM NO	PIC	INPUT POWER	POWER	DIMENSION	WEIGHT	WATERPROOF
XLG-75		100 ~ 305VAC 142 ~ 431VDC	DC12V:60W DC24V:74W	L140*W63*H32mm	0.58Kg	IP67
XLG-100		100 ~ 305VAC 142 ~ 431VDC	DC12V:96W DC24V:96W	L140*W63*H32mm	0.58Kg	IP67
XLG-150		100 ~ 305VAC 142 ~ 431VDC	DC12V:150W DC24V:150W	L180*W63*H35.5mm	0.8Kg	IP67
XLG-200		100 ~ 305VAC 142 ~ 431VDC	DC12V:192W DC24V:199W	L199*W63*H35.5mm	0.85kg	IP67
XLG-320		100 ~ 305VAC 142 ~ 431VDC	DC12V:216W DC24V:312W	L246*W77*H39.5mm	1.4kg	IP67

Adaptor

ITEM NO	PIC(Wall Mount & Desktop Type)	INPUT	OUTPUT	DC CABLE	Socket	Body Color
12-18W		100-240Vac,50/60Hz	DC12V/24V	2464#,24AWG, 5.5*2.1mm,1.2M	Au Plug	Black
18-30W		100-240Vac,50/60Hz	DC12V/24V	2464#,24AWG, 5.5*2.1mm,1.2M	Au Plug	Black
30-36W		100-240Vac,50/60Hz	DC12V/24V	2464#,24AWG, 5.5*2.1mm,1.2M	Au Plug	Black
36-48W		100-240Vac,50/60Hz	DC12V/24V	2464#,24AWG, 5.5*2.1mm,1.2M	Au Plug	Black
48-60W		100-240Vac,50/60Hz	DC12V/24V	2464#,24AWG, 5.5*2.1mm,1.2M	Au Plug	Black



DEVRY GROUP LIMITED

DEVRY GROUP PTY.LTD

Zhong Shan Address

Floor 1st, No1 Xin Hua
Building, Xin Xing
Square, Guyi, Guzhen
Town, Zhongshan City.
Guangdong Province.
528415

Shen Zhen Address

2nd Floor, C Block, Qiao
Tong Yuan Ling
Industrial Park, Shi Yan
Town, Shenzhen,
Guangdong Province,
China.

Australia Address.

6/5 Rawson Street,
Wollongong, NSW,
Australia 2500

Tel:86-13913837927 (Wechat/Whatsapp)
Tel:61-459 844 358 (Wechat/Whatsapp)
Email: sales@dv-led.com sales@dv-led.com.au
www.dv-led.com www.dv-led.com.au